

actual size

Quartz Crystal · HC-49/USM(2H)

2 Pad Version · 11.4 x 4.7 mm

- for automotive type, see automotive datasheet
- extended temperature ranges available
- reflow soldering temperature: 260 °C max.
-



General Data

type	HC-49/USM(2H)	
frequency range	fund. AT-cut	4.0 ~ 33.0 MHz
	3rd OT AT-cut	ask for availability
	fund. BT-cut	ask for availability
frequency tolerance at 25 °C	± 20 ppm / ± 30 ppm / ± 50 ppm	
load capacitance C_L	7 pF ~ 32 pF or series	
shunt capacitance C_0	< 5 pF	
storage temperature	-40 °C ~ +125 °C	
series	see table	
drive level max.	100 uW(others recommended)	
aging	± 5 ppm max first year	

ESR (series resistance Rs)

frequency in MHz	vibration mode	ESR max. in Ω	ESR typ. in Ω
4.0 ~ 5.999	fund. AT	100	60
6.0 ~ 6.999	fund. AT	70	35
7.0 ~ 7.999	fund. AT	50	25
8.0 ~ 8.999	fund. AT	50	25
9.0 ~ 13.999	fund. AT	35	15
14.0 ~ 33.000	fund. AT	30	10
ask	3rd OT AT	(100)	(60)
ask	fund. BT	(50)	(20)

numbers in brackets () only for reference

Frequency Stability vs. Temperature

		± 20 ppm	± 30 ppm	± 50 ppm	± 100 ppm	± 150 ppm	+10/-100 ppm
-10 °C ~ +60 °C	T1						○ BT-cut
-20 °C ~ +70 °C	STD	D	○	●			
-40 °C ~ +85 °C	T2		○	○	●		
-40 °C ~ +105 °C	T3			○	○		
-40 °C ~ +125 °C	T4					○	


● standard
 ○ available
 D ask, if available

Marking

frequency with load capacitance code
company code / date code / internal code

		Jan.	Febr.	Mar.	Apr.	May	June	July	Aug.	Sept.	Oct.	Nov.	Dec.
2011	2015	a	b	c	d	e	f	g	h	i	k	l	m
2012	2016	n	p	q	r	s	t	u	v	w	x	y	z
2013	2017	A	B	C	D	E	F	G	H	J	K	L	M
2014	2018	N	P	Q	R	S	T	U	V	W	X	Y	Z

Dimensions

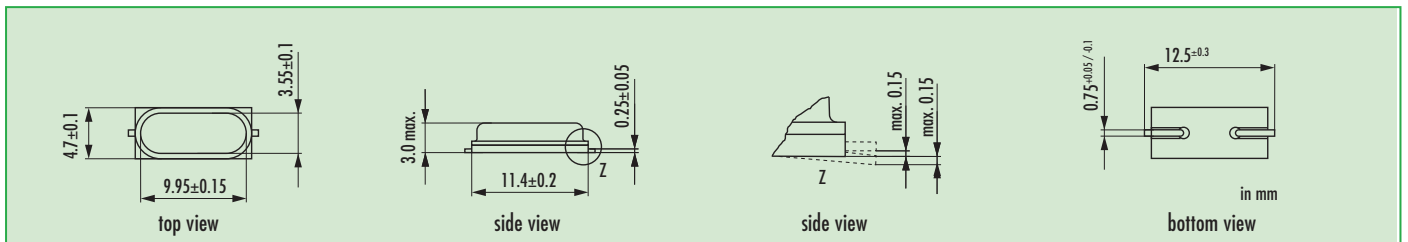

Taping Specification

